



Doosan Infracore
Forklifts

PRO 5
SERIES



B10R-5 / B13R-5 / B15R-5 / B16R-5
2,000lb to 3,200lb Capacity
24VOLT
Pneumatic & Solid Tire

3 Wheel Electric Forklift Trucks

B10R / 13R / 15R / 16R-5 (24V Rear Wheel Drive)

2,000lb to 3,200lb Capacity

ac
technology

PRO 5
SERIES



PSC0708A1 (Aug.2007)



Doosan Infracore
Forklifts

Doosan Infracore America Corporation
4350 Renaissance Parkway,
Warrensville Heights, Ohio, 44128 U.S.A.
Tel : 216-595-1212
Fax : 216-595-1214
www.doosanlift.com

AUTHORIZED DEALER

Product and specifications are subject to improvement and change without notice.

B10R / 13R / 15R / 16R-5 REAR WHEEL DRIVE

Doosan's Rear Wheel Drive Electric Forklifts
Will Surpass Customer Expectations
for Cost Effectiveness, Performance and Productivity



The B15R series combines a compact design with technological advances and operator enhancements to provide customers with both productive and cost effective material handling operations

For operator effectiveness, the F.C.U. (Front Cockpit Unit) was ergonomically designed for comfortable driving and reduced effort operation of both the drive and hydraulic systems.

For smooth control, A.C.T. (Active Control Technology) has been incorporated into full AC Drive and Hydraulics.

For greater productivity, AC drive & hydraulic motors promote energy efficiency and reduce overall operating costs.

For enhanced protection, O.S.S. (Operator Sensing System) raises awareness of important operational conditions.

For outstanding durability & reliability, O.C.D.B. (Oil Cooled Disc Brake) is provided as standard equipment.

Comfort Comes Standard !



*Operator Comfort
and Operator Productivity
Go Hand in Hand*

● **Easy to Access & Exit**

- Low Entry Height
- Wide leg & head room, grab bar on O.H.G. rail & hood.

● **Easy to Drive**

- Deluxe Suspension Seat (Optional) With OSS

A comfortable deluxe suspension seat with OSS(Operator Sensing System), a large seatback angle, longer seat travel length and operator's weight resistance on front side allow multiple adjustments for optimum seating comfort.



● **Easy to Control**

- Finger Tip (Optional)

Permit precise controlled load movement by literally lifting only a finger to significantly reduce operator movement and excessive effort.



● **Easy to Operate**

- Infinitely Adjustable Steering Column


Readily adapts to any size operator

- Hydraulic Control Levers

Low effort activation provides smooth response

- Direction levers

Easy to operate while turning steering wheel

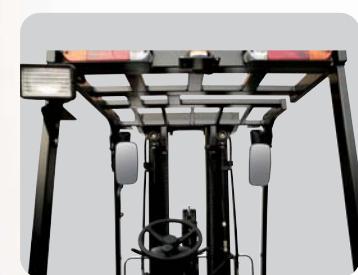

● **Easy to See**

-High Visibility Overhead Guard and Front-End

Wider mast window, repositioned hydraulic hoses and flat bar style overhead guard optimize operator sight lines forward, up and to the load.



● **Easy to Service**

-Side Roll in & Out Battery (Optional)

Easy battery removal with minimal effort
Tool free side panel, easy removal of floor plate and control valve cover.

DRIVE THE DIFFERENCE..

MVE DOOSAN !

Productive, Yet Energy Efficient !



DRIVE THE DIFFERENCE...

Energy Efficient B15R Series Makes Good Business Sense

Electric truck productivity is a delicate balance of speed, control & energy consumption - All achieved through several DOOSAN exclusive design innovations.

● DOOSAN Exclusive ACT (Active Control Technology)

This innovative system provides several productivity advantages:

- Active Performance Control : self-adjusts performance criteria to changes in operating conditions
- Active Energy control : maintains consistent performance through 80% of battery charge life
- Active Comfort Control : customizes operating parameters to match driver's style for increased comfort, confidence & control
- Active Heat Control : system self protects when overheating detected to correct temperature imbalance

● Operator-Centric Performance Selection

Operator controls the truck's performance capability and can optimize productivity and battery consumption rate to match application requirements.



- H-mode (High Performance)
- S-mode (Standard Performance)
- E-mode (Energy Efficient Performance)
- Turtle mode
(Reduces Travel Speed while maintaining lift speed)

● More Work per Battery Charge

Programmable operating functions customize truck performance for energy efficiency to achieve more run time per battery charge.



● ITC (Intelligent Torque Control)

Closed-loop feedback system monitors loads on drive and hydraulic motors to maintain speed consistency whether the truck is empty or loaded.

It also provides :

- Responsive acceleration
- Excellent gradeability
- Full protection against short /open circuits
- Continuous temperature monitoring of panel and motors to maximize material handling productivity.

DRIVE DOOSAN !

Operational Awareness is High Priority



The B15R Series Provides a Range of Tools For Monitoring Operational Readiness.



- **Pivoting Front Axle**

Extends forward as mast tilts back providing longer wheelbase for better stability.

Retracts as mast tilts forward providing shorter wheelbase for better maneuverability.


- **OSS (Operator Sensing System)**

Audible alarm will sound when operator leaves the seat without parking brake applied.

Truck stops moving with directional switch in either forward or reverse when operator leaves the truck without parking brake applied. Transmission automatically shifts into neutral.

- **Anti Roll Back & Down**

Holds truck in position when stopping on ramp.

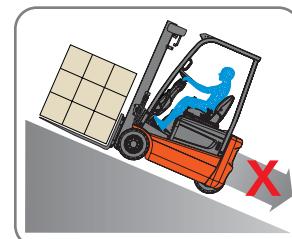

- **Rear Grab Bar With Horn (Optional)**

When operator drives in reverse, grab bar with horn button on rear-right O.H.G. rail can warn of approaching vehicle.




- **Steering Angle Sensing System**

- The angle sensing information controls the travel speed when turning by slowing truck while cornering.



- **Intelligent Instrument and Control Panels**

The combination of LED displays and 7-digit graphic LCD display intelligently provides operators with all the details they need, including operational information, safety indicators, diagnostics and programmable settings.

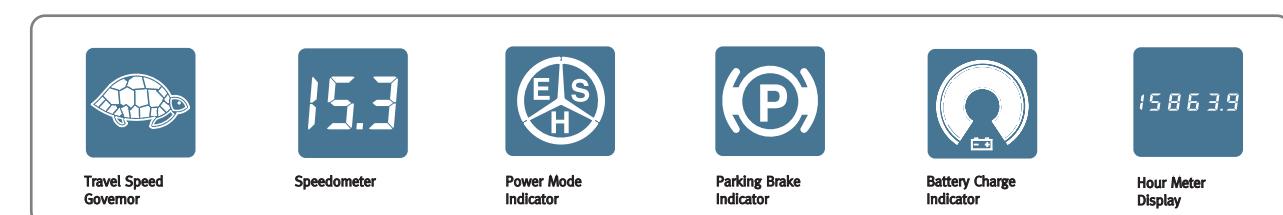

Durability and Reliability Create Profitability !

DOOSAN's goal is to make your material handling operation both efficient and profitable. The durability and reliability of our trucks will aid in minimizing your truck down time and reduce total cost of ownership.

AC drive and hydraulic controller & motor system



No brushes, no commutator and no directional contactors, minimizes maintenance.



AC controller permits programmable adjustments to operating functions for customized truck performance.

Provides both run-time and trouble shooting diagnostic capability.

Doosan exclusive & innovative Oil cooled Disc Brake



Virtually maintenance-free, ODB is standard equipment on the PRO5 Series, B16R-5. The enclosed brake system eliminates outside contamination significantly extending the brake life up to 5 times longer when compared to conventional shoe brakes.

AC Controller has power to spare

The command center of the B16R PRO 5 series is our AC controller consisting of a main logic board and independent power modules with direct links to drive motor and the hydraulic motor to manage, direct and monitor every operating system on the truck.

This control unit regulates and monitors the following functions :



- fu Anti-Roll Back and Anti-Roll Down with adjustable ramp stop time
- fu Regenerative Braking
- fu Electrically Assisted Braking
- fu Static Return to Off (SRO)
- fu Drive Speed Compensation (Load/Unload)
- fu Drive Speed Acceleration/Deceleration/Reduction
- fu Continuous Lift Speed Control/ Pump Motor Speed Compensation
- fu Battery Discharge Indicator with Adjustable Reset Value
- fu Over Temperature Protection for power modules and Motors
- fu Low and High Voltage Limit
- fu Diagnostics and Stored Error Codes
- fu Power Line Fault Detection (Fuse/Contactor)
- fu Continuous Temperature Measuring (Controller, Motor)
- fu Full Protection against Short or Open Circuits

■ Option Availability

Options	B10/13R/15R-5	B16R-5
Finger Tip Control Hydraulic Valve		
Pneumatic Tires		x
Non-marking Tires		
Full Suspension Deluxe Seat - Vinyl		
Full Suspension Deluxe Seat with Armrest		
Keyless Ignition Switch		
Two Front and Rear Combination Lights		
One Rear Flood Light		
Back-up Alarm		
Rear Strobe Light		
Rear View Mirror		
Integral Sideshifter		
Integral Sideshifting Fork Positioner		
Hydraulic Accumulator		
Battery Side Roll In Out		





Doosan Infracore
Forklifts

TECHNICAL SPECIFICATIONS

3 Wheel Electric Forklift Trucks

B10R / 13R / 15R / 16R-5 (24V Rear Wheel Drive)

2,000lb to 3,200lb Capacity

PRO 5
SERIES

ac
technology



2,000/2,500/3,000/3,200 lb Capacities


3 Wheel Electric Forklift Trucks

MAIN VEHICLE SPECIFICATIONS

CHARACTERISTICS	2 Model		B10R-5	B13R-5	B15R-5	B16R-5	
3 Load Capacity	at rated load center	lb(kg)	2000(1000)	2500(1250)	3000(1500)	3200(1600)	
4 Load Center		in(mm)	24(500)	24(500)	24(500)	24(500)	
5 Power type			electric	electric	electric	electric	
6 Operator type			Driver seated	Driver seated	Driver seated	Driver seated	
7 Tire type	P:Pneumatic, E:Solid Soft, C: Cushion		P,E	P,E	P,E	E	
8 Wheels (x=Driven)			2 / 1x	2 / 1x	2 / 1x	2 / 1x	
9 Max. Fork Height	with STD 2-stage mast	in(mm)	118(3000)	118(3000)	118(3000)	118(3000)	
10 Free Lift		in(mm)	5(130)	5(130)	5(130)	5(130)	
12 Fork Carriage	ISO Class						
13 Forks	Thickness x Width x Length	in(mm)	1.4 x 3.9 x 35.4 (35 x 100 x 900)	1.4 x 3.9 x 35.4 (35 x 100 x 900)	1.4 x 3.9 x 35.4 (35 x 100 x 900)	1.4 x 3.9 x 35.4 (35 x 100 x 900)	
	Fork Spacing(Min x Max)	in(mm)	7.9 x 35.6 (200 x 905)	7.9 x 35.6 (200 x 905)	7.9 x 35.6 (200 x 905)	7.9 x 35.6 (200 x 905)	
14 Tilt of Mast	Forward/Backward	deg	3 / 6	3 / 6	3 / 6	3 / 6	
15	Length to Fork Face	in(mm)	67.3(1710)	68.3(1735)	69.3(1760)	70.3(1785)	
16	Overall Width	in(mm)	39.2(996)	39.2(996)	39.2(996)	39.2(996)	
17	Mast Lowered Height	in(mm)	79.7(2025)	79.7(2025)	79.7(2025)	79.7(2025)	
18	Mast Extended Height	in(mm)	158.5(4025)	158.5(4025)	158.5(4025)	158.5(4025)	
19	Overhead Guard Height	in(mm)	81.4(2067)	81.4(2067)	81.4(2067)	81.4(2067)	
20	Seat Height	in(mm)	39.8(1010)	39.8(1010)	39.8(1010)	39.8(1010)	
21	Turning Radius	Minimum outside	in(mm)	54.3(1380)	55.3(1405)	56.3(1430)	57.3(1455)
22	Load Moment Center		in(mm)	13.0(330)	13.0(330)	13.0(330)	13.0(330)
23	Right Angle Stacking Aisle Width With Pallet 1000X1200 / 800X1200 [LXW]	in(mm)	119.6 / 124.4 (3039 / 3161)	120.6 / 125.4 (3064 / 3186)	121.6 / 126.4 (3089 / 3211)	122.6 / 127.4 (3114 / 3236)	
PERFORMANCE	Speed	Travel, Loaded/Unloaded	mph (km/h)	7.8 / 8.4 (12.5 / 13.5)	7.5 / 8.1 (12.0 / 13.0)	7.5 / 7.8 (12.0 / 12.5)	7.5 / 7.8 (12.0 / 12.5)
		Lifting, Loaded/Unloaded	fpm (mm/s)	63.0 / 102.4 (320 / 520)	61.0 / 102.4 (310 / 520)	59.1 / 102.4 (300 / 520)	59.1 / 102.4 (300 / 520)
		Lowering, Loaded/Unloaded	fpm (mm/s)	98.4 / 88.6 (500 / 450)			
28	Max. Drawbar pull	Loaded	lb(kg)	639.5(290)	787.2(357)	848.9(385)	780.6(354)
30	Max. Gradeability	At 1.6 km/h, Loaded	%	19	19	16	15
WEIGHT	32 Total Weight	with minimum weight of battery	lb(kg)	5404.5(2451)	6123.3(2777)	6507.0(2951)	6694.4(3036)
	33 Axle Load at Loaded	Front / Rear	lb(kg)	6630.4 / 981.2 (3007 / 445)	7686.6 / 1192.9 (3486 / 541)	8727.4 / 1087.1 (3958 / 493)	9060.3 / 1162.0 (4109 / 527)
	34 Axle Load at Unloaded	Front / Rear	lb(kg)	2811.4 / 2593.1 (1275 / 1176)	2912.8 / 3208.3 (1321 / 1455)	3104.6 / 3402.3 (1408 / 1543)	3060.5 / 3633.8 (1388 / 1648)
CHASSIS	Tires	Number of wheels(Front/ Rear)		2 / 1	2 / 1	2 / 1	2 / 1
		Size, Front		18 x 7-8	18 x 7-8	18 x 7-8	18 x 7-8
		Size, Rear		18 x 7-8	18 x 7-8	18 x 7-8	18 x 7-8
	38 Wheel Base	Distance (forward / vertical / back)	in(mm)	43.7 / 44.7 / 46.7 (1111 / 1135 / 1185)	43.7 / 44.7 / 46.7 (1111 / 1135 / 1185)	45.7 / 46.7 / 48.6 (1161 / 1185 / 1235)	45.7 / 46.7 / 48.6 (1161 / 1185 / 1235)
	39 Tread Width	Front	in(mm)	33.1(840)	33.1(840)	33.1(840)	33.1(840)
		Rear	in(mm)	0.0(0)	0.0(0)	0.0(0)	0.0(0)
	40 Ground Clearance	Loaded	at lowest	in(mm)	3.3(85)	3.3(85)	3.3(85)
			at center of wheelbase	in(mm)	3.5(90)	3.5(90)	3.5(90)
42 Brakes	Service			FOOT/ HYD	FOOT/ HYD	FOOT/ HYD	FOOT/ HYD
	Parking			HAND / MECH	HAND / MECH	HAND / MECH	HAND / MECH
POWER TRAIN	45 Battery	Type		LEAD-ACID	LEAD-ACID	LEAD-ACID	LEAD-ACID
		Voltage/Capacity(Max)	V/AH	24 / 875	24 / 875	24 / 1000	24 / 1000
		Minimum Weight	lb(kg)	992.1(450)	1322.8(600)	1488.1(675)	1488.1(675)
	47 Electric Motors	Drive motor - 1 Hour Rating	HP(kW)	6.7(5)	6.7(5)	6.7(5)	6.7(5)
		Hyd. Motor - 20% Duty	HP(kW)	9.4(7)	9.4(7)	9.4(7)	9.4(7)
54	Control Type	Drive and hydraulic	type	Inverter AC	Inverter AC	Inverter AC	Inverter AC
55	Transfer	Brake Type	type	ODB	ODB	ODB	ODB
57 Relief Pressure	System	psi(bar)	2305.5(159)	2305.5(159)	2305.5(159)	2305.5(159)	2305.5(159)
	Attachment	psi(bar)	2305.5(159)	2305.5(159)	2305.5(159)	2305.5(159)	2305.5(159)

Note: Specification values quoted in this specification sheet has been rounded. Performance may vary due to operation conditions.
Products and specifications are subject to improvement and change without prior notices.

DIMENSIONAL DRAWING

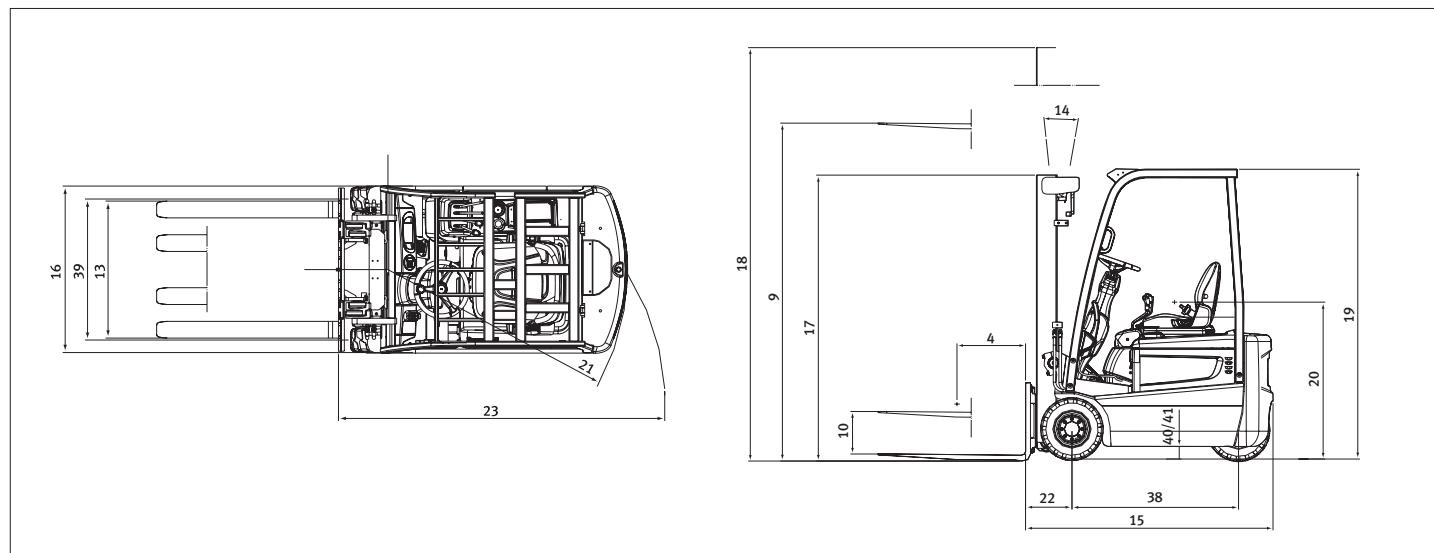

MAST SPECIFICATIONS and RATED CAPACITIES

B10R -5

Mast Type	Maximum Fork Height		Fully Lowered Height		Fully Extended Height				Free Lift				Solid Soft Tire			Pneumatic Tire		
					With Load Backrest		W/O Load Backrest		With Load Backrest		W/O Load Backrest		Tilt Angle	Loaded Capacities	Tilt Angle	Loaded Capacities		
	mm	in	mm	in	mm	in	mm	in	mm	in	deg	kg	lb	deg	kg	lb		
STD	3000	118	2025	80	4045	159	3600	142	130	5	130	5	3/6	1000	2000	3/6	1000	2000
STD	3300	130	2175	86	4345	171	3900	154	130	5	130	5	3/6	1000	2000	3/6	1000	2000
STD	3500	138	2275	90	4545	179	4100	161	130	5	130	5	3/6	1000	2000	3/6	1000	2000
STD	3700	146	2375	94	4745	187	4300	169	130	5	130	5	3/6	1000	2000	3/6	1000	2000
STD	4000	158	2575	101	5045	199	4600	181	130	5	130	5	3/6	1000	2000	3/6	1000	2000
STD	4500	177	2825	111	5545	218	5100	201	130	5	130	5	3/6	975	1950	3/6	975	1950
FF	2700	106	1875	74	3745	147	3325	131	870	34	1290	51	3/5	1000	2000	3/5	1000	2000
FF	3000	118	2025	80	4045	159	3625	143	1020	40	1440	57	3/5	1000	2000	3/5	1000	2000
FF	3300	130	2175	86	4345	171	3925	155	1170	46	1590	63	3/5	1000	2000	3/5	1000	2000
FFT	4000	158	1905	75	5050	199	4630	182	900	35	1320	52	3/5	1000	2000	3/5	1000	2000
FFT	4500	177	2070	82	5545	218	5125	202	1065	42	1485	59	3/5	975	1950	3/5	975	1950
FFT	4750	187	2155	85	5795	228	5375	212	1150	45	1570	62	3/5	950	1900	3/5	950	1900
FFT	5000	197	2270	89	6045	238	5625	222	1265	50	1685	66	3/5	825	1650	3/5	825	1650
FFT	5500	217	2505	99	6550	258	6130	241	1500	59	1920	76	3/5	750	1500	3/5	750	1500
FFT	6000	236	2670	105	7045	277	6625	261	1665	66	2085	82	3/5	575	1150	3/5	575	1150

B13R-5

Mast Type	Maximum Fork Height		Fully Lowered Height		Fully Extended Height				Free Lift				Solid Soft Tire			Pneumatic Tire		
					With Load Backrest		W/O Load Backrest		With Load Backrest		W/O Load Backrest		Tilt Angle	Loaded Capacities	Tilt Angle	Loaded Capacities		
	mm	in	mm	in	mm	in	mm	in	mm	in	deg	kg	lb	deg	kg	lb		
STD	3000	118	2025	80	4045	159	3600	142	130	5	130	5	3/6	1250	2500	3/6	1250	2500
STD	3300	130	2175	86	4345	171	3900	154	130	5	130	5	3/6	1250	2500	3/6	1250	2500
STD	3500	138	2275	90	4545	179	4100	161	130	5	130	5	3/6	1250	2500	3/6	1250	2500
STD	3700	146	2375	94	4745	187	4300	169	130	5	130	5	3/6	1250	2500	3/6	1250	2500
STD	4000	158	2575	101	5045	199	4600	181	130	5	130	5	3/6	1250	2500	3/6	1250	2500
STD	4500	177	2825	111	5545	218	5100	201	130	5	130	5	3/6	1225	2450	3/6	1225	2450
FF	2700	106	1875	74	3745	147	3325	131	870	34	1290	51	3/5	1250	2500	3/5	1250	2500
FF	3000	118	2025	80	4045	159	3625	143	1020	40	1440	57	3/5	1250	2500	3/5	1250	2500
FF	3300	130	2175	86	4345	171	3925	155	1170	46	1590	63	3/5	1250	2500	3/5	1250	2500
FFT	4000	158	1905	75	5050	199	4630	182	900	35	1320	52	3/5	1250	2500	3/5	1250	2500
FFT	4500	177	2070	82	5545	218	5125	202	1065	42	1485	59	3/5	1200	2400	3/5	1200	2400
FFT	4750	187	2155	85	5795	228	5375	212	1150	45	1570	62	3/5	1175	2350	3/5	1175	2350
FFT	5000	197	2270	89	6045	238	5625	222	1265	50	1685	66	3/5	1050	2100	3/5	1050	2100
FFT	5500	217	2505	99	6550	258	6130	241	1500	59	1920	76	3/5	850	1700	3/5	850	1700
FFT	6000	236	2670	105	7045	277	6625	261	1665	66	2085	82	3/5	550	1100	3/5	550	1100

B15R-5

Mast Type	Maximum Fork Height		Fully Lowered Height		Fully Extended Height				Free Lift				Solid Soft Tire			Pneumatic Tire		
					With Load Backrest		W/O Load Backrest		With Load Backrest		W/O Load Backrest		Tilt Angle	Loaded Capacities		Tilt Angle	Loaded Capacities	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	deg	kg	lb	deg	kg	lb
STD	3000	118	2025	80	4045	159	3600	142	130	5	130	5	3/8	1500	3000	3/8	1500	3000
STD	3300	130	2175	86	4345	171	3900	154	130	5	130	5	3/6	1500	3000	3/6	1500	3000
STD	3500	138	2275	90	4545	179	4100	161	130	5	130	5	3/6	1500	3000	3/6	1500	3000
STD	3700	146	2375	94	4745	187	4300	169	130	5	130	5	3/6	1500	3000	3/6	1500	3000
STD	4000	158	2575	101	5045	199	4600	181	130	5	130	5	3/6	1475	2950	3/6	1475	2950
STD	4500	177	2825	111	5545	218	5100	201	130	5	130	5	3/6	1400	2800	3/6	1400	2800
FF	2700	106	1875	74	3745	147	3325	131	870	34	1290	51	3/5	1500	3000	3/5	1500	3000
FF	3000	118	2025	80	4045	159	3625	143	1020	40	1440	57	3/5	1500	3000	3/5	1500	3000
FF	3300	130	2175	86	4345	171	3925	155	1170	46	1590	63	3/5	1500	3000	3/5	1500	3000
FFT	4000	158	1905	75	5050	199	4630	182	900	35	1320	52	3/5	1450	2900	3/5	1450	2900
FFT	4500	177	2070	82	5545	218	5125	202	1065	42	1485	59	3/5	1375	2750	3/5	1375	2750
FFT	4750	187	2155	85	5795	228	5375	212	1150	45	1570	62	3/5	1350	2700	3/5	1350	2700
FFT	5000	197	2270	89	6045	238	5625	222	1265	50	1685	66	3/5	1200	2400	3/5	1200	2400
FFT	5500	217	2505	99	6550	258	6130	241	1500	59	1920	76	3/5	900	1800	3/5	900	1800
FFT	6000	236	2670	105	7045	277	6625	261	1665	66	2085	82	3/5	600	1200	3/5	600	1200

B16R-5

Mast Type	Maximum Fork Height		Fully Lowered Height		Fully Extended Height				Free Lift				Solid Soft Tire			Pneumatic Tire		
					With Load Backrest		W/O Load Backrest		With Load Backrest		W/O Load Backrest		Tilt Angle	Loaded Capacities		Tilt Angle	Loaded Capacities	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	deg	kg	lb	deg	kg	lb
STD	3000	118	2025	80	4045	159	3600	142	130	5	130	5	3/6	1600	3200	-	-	-
STD	3300	130	2175	86	4345	171	3900	154	130	5	130	5	3/6	1600	3200	-	-	-
STD	3500	138	2275	90	4545	179	4100	161	130	5	130	5	3/6	1600	3200	-	-	-
STD	3700	146	2375	94	4745	187	4300	169	130	5	130	5	3/6	1600	3200	-	-	-
STD	4000	158	2575	101	5045	199	4600	181	130	5	130	5	3/6	1575	3150	-	-	-
STD	4500	177	2825	111	5545	218	5100	201	130	5	130	5	3/6	1500	3000	-	-	-
FF	2700	106	1875	74	3745	147	3325	131	870	34	1290	51	3/5	1600	3200	-	-	-
FF	3000	118	2025	80	4045	159	3625	143	1020	40	1440	57	3/5	1600	3200	-	-	-
FF	3300	130	2175	86	4345	171	3925	155	1170	46	1590	63	3/5	1600	3200	-	-	-
FFT	4000	158	1905	75	5050	199	4630	182	900	35	1320	52	3/5	1550	3100	-	-	-
FFT	4500	177	2070	82	5545	218	5125	202	1065	42	1485	59	3/5	1500	3000	-	-	-
FFT	4750	187	2155	85	5795	228	5375	212	1150	45	1570	62	3/5	1450	2900	-	-	-
FFT	5000	197	2270	89	6045	238	5625	222	1265	50	1685	66	3/5	1300	2600	-	-	-
FFT	5500	217	2505	99	6550	258	6130	241	1500	59	1920	76	3/5	875	1750	-	-	-
FFT	6000	236	2670	105	7045	277	6625	261	1665	66	2085	82	3/5	575	1150	-	-	-

Full Product Line

Doosan offers a full line of lift trucks from 3,000lb(1,500kg) to 36,000lb(16,000kg) pounds to fill all your material handling needs. Contact your dealer for specific information on our various models and configurations.

Complete Distribution Network

Doosan lift trucks are sold and serviced by 95 dealers at over 200 locations in the U.S and Canada.

Call us at 1-800-323-9662 for the location of a dealer near you, or visit us at www.doosanlift.com

For corporate information go to :

www.dhiac.com

(June.2007)



Doosan Infracore
Forklifts

Doosan Infracore America Corporation
4350 Renaissance Parkway,
Warrensville Heights, Ohio, 44128 U.S.A.
Tel : 216-595-1212
Fax : 216-595-1214

AUTHORIZED DEALER

Product and specifications are subject to improvement and change without notice.